
## **AGS Secure Feature Service URL**

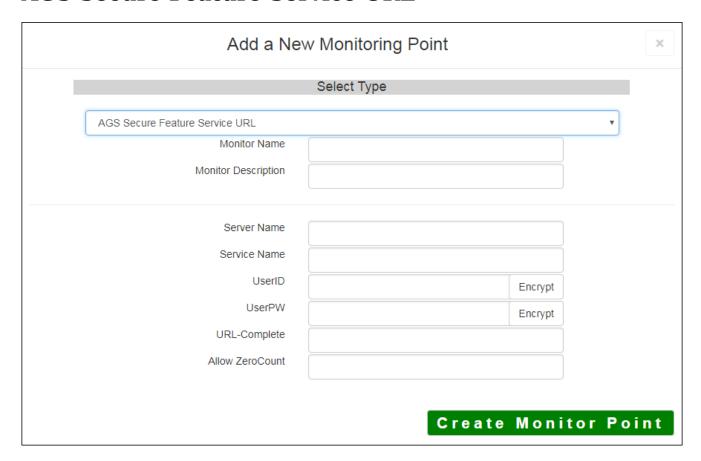

The AGS Secure Feature Service URL monitoring point checks an ArcGIS Server Secure Feature service for layer data and provides a count of the number of records returned.

The script can be used whether or not you have a non-standard installation.

The parameters that are unique to the AGS Feature Service URL include:

Server Name	DNS name of server where AGS service is located
Service Name	Name of the Rest Feature or Image Service on an ArcGIS Server. If service is
	name of folder/service is needed.
UserID	ArcGIS Server Admin user ID using either Windows or ArcGIS Server securit
UserPW	ArcGIS Server Admin user password
URL-Complete	This parameter can be retrieved from the REST interface of the service and e
	parameters to test. Copy the parameters from the 'URL' In the address bar of
Allow ZeroCount	(Optional) Enter 'YES' for that services that can return zero records under no
	operations, so that the point won't be considered down.

For non-secured AGS Feature Service URLs, refer to the <u>AGS Feature Service URL</u> monitoring point script Retrieving the URL-Complete parameter from the REST service is a several step process.

**Step 1.1:** Open your Internet browser and enter the URL for your ArcGIS® Rest Services Interface

Example:

http://YourServerName/ArcGIS/Rest/Services

## ArcGIS Services Directory

**Home** 

## Folder: /

Current Version: 9.31

View Footprints In: Google Earth

Folders:

Your Folders

Services:



**Step 1.2:** In the bottom left of the browser screen, locate "**Supported Operations**"

Click on [Query]

## Supported Operation

**Step 1.3:** In the browser window, enter the query parameters you would like to monitor. Change the form **Query**.

Step 1.4: Copy the complete URL from the browser address field



Step 2: Paste the complete URL in the URL-Complete field Provided

Step 3: Click [Create Monitor Point]

Article ID: 274

Last updated: 14 Aug, 2018

Revision: 9

 $\label{thm:condition} \mbox{GeoSystems Monitor Enterprise -> Product Guide $v4.0 -> Monitor Point Types \& Parameters -> AGS Secure Feature Service URL$ 

 $\underline{http://www.vestra-docs.com/index.php?View=entry\&EntryID=274}$